


SINGULAR WEIR STRUCTURE

- Larger wings at both the upstream and downstream to prevent erosion & effects of swirling
- Can be used for bankless channels and supply channels in place of standard water stops.
- Successful in reactive soils.
- Deeper sides to stop water undermining the structural stability.
- These units are available with steel boards or winch control tarp systems with the NEW solar powered 'wireless automated control system' that can monitor and control the stop straight from your smart phone.
- Customized Product available at request.

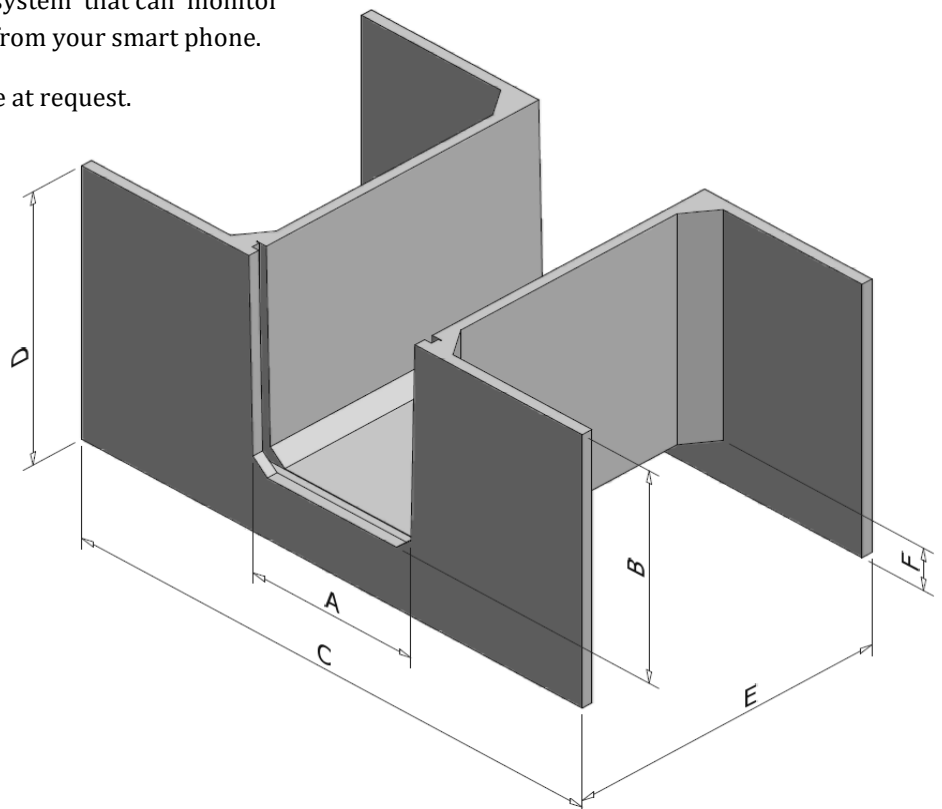

CODE	A	B	C	D	E	F	APPROX. WEIGHT
	MM	MM	MM	MM	MM	MM	
491	900	600	2700	1000	2500	300	2480kg
492	900	900	2700	1300	2500	300	3170kg
493	1200	900	3800	1300	2200	300	3460kg
494	1200	1200	3800	1600	2200	300	4030kg
495	1200	1500	3800	1900	2200	300	4730kg