

CONCRETE WATER CHANNELS

- Stops erosion and seepage
- Available in shorter lengths on order.
- Able to be laid on flat bed saving installation time & costs.
- Easy installation
- Able to carry 72MGL with minimal head loss on a flat grade of 20m or less.
- Rubber seal joint to easily join lengths.
- Trafficable lids available to withstand heavy loads.
- Able to be used for numerous solutions including road crossings which maintain a low head.





CODE	PRODUCT	APPROX. WEIGHT
177	Lid to suit Channel	3200kg
176	6m Channel Section	4000kg

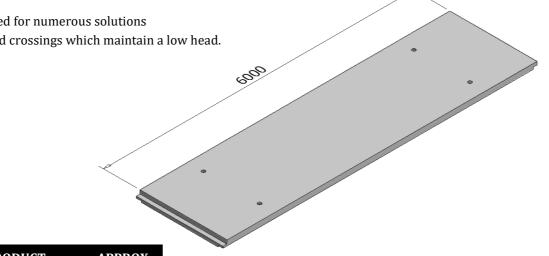